⚠ 1.

/

The products in this manual are industrial products and are all open-type housing designs. It is essential to install these products within a control cabinet that is safeguarded against dust, moisture, and accidents such as electric shocks or physical impacts. Additionally, protective measures must be taken to prevent malfunctions or damage caused by improper operation or accidents involving non-maintenance personnel. Failure to do so may lead to serious risks to personnel safety and potential loss of prope r y.

M

Please refer to the M series hardware manual for more detailed information.

⚠ Batte r	CR2032 CR2032 3V UL The RTC batte r expansion card comes with a built-in CR2032 batte r (3V). Users may replace it with a UL-ce r i fed CR2032 batte r of matching speci fcations. La ca r e d'extension de batterie du minuteur temps réel (RTC) est équipée d'une batterie CR2032 intégrée (3V). Les utilisateurs peuvent la remplacer par une batterie CR2032 ce r i fée UL et de spéci fcations correspondantes.

2.

HC _____ - RTC - ___
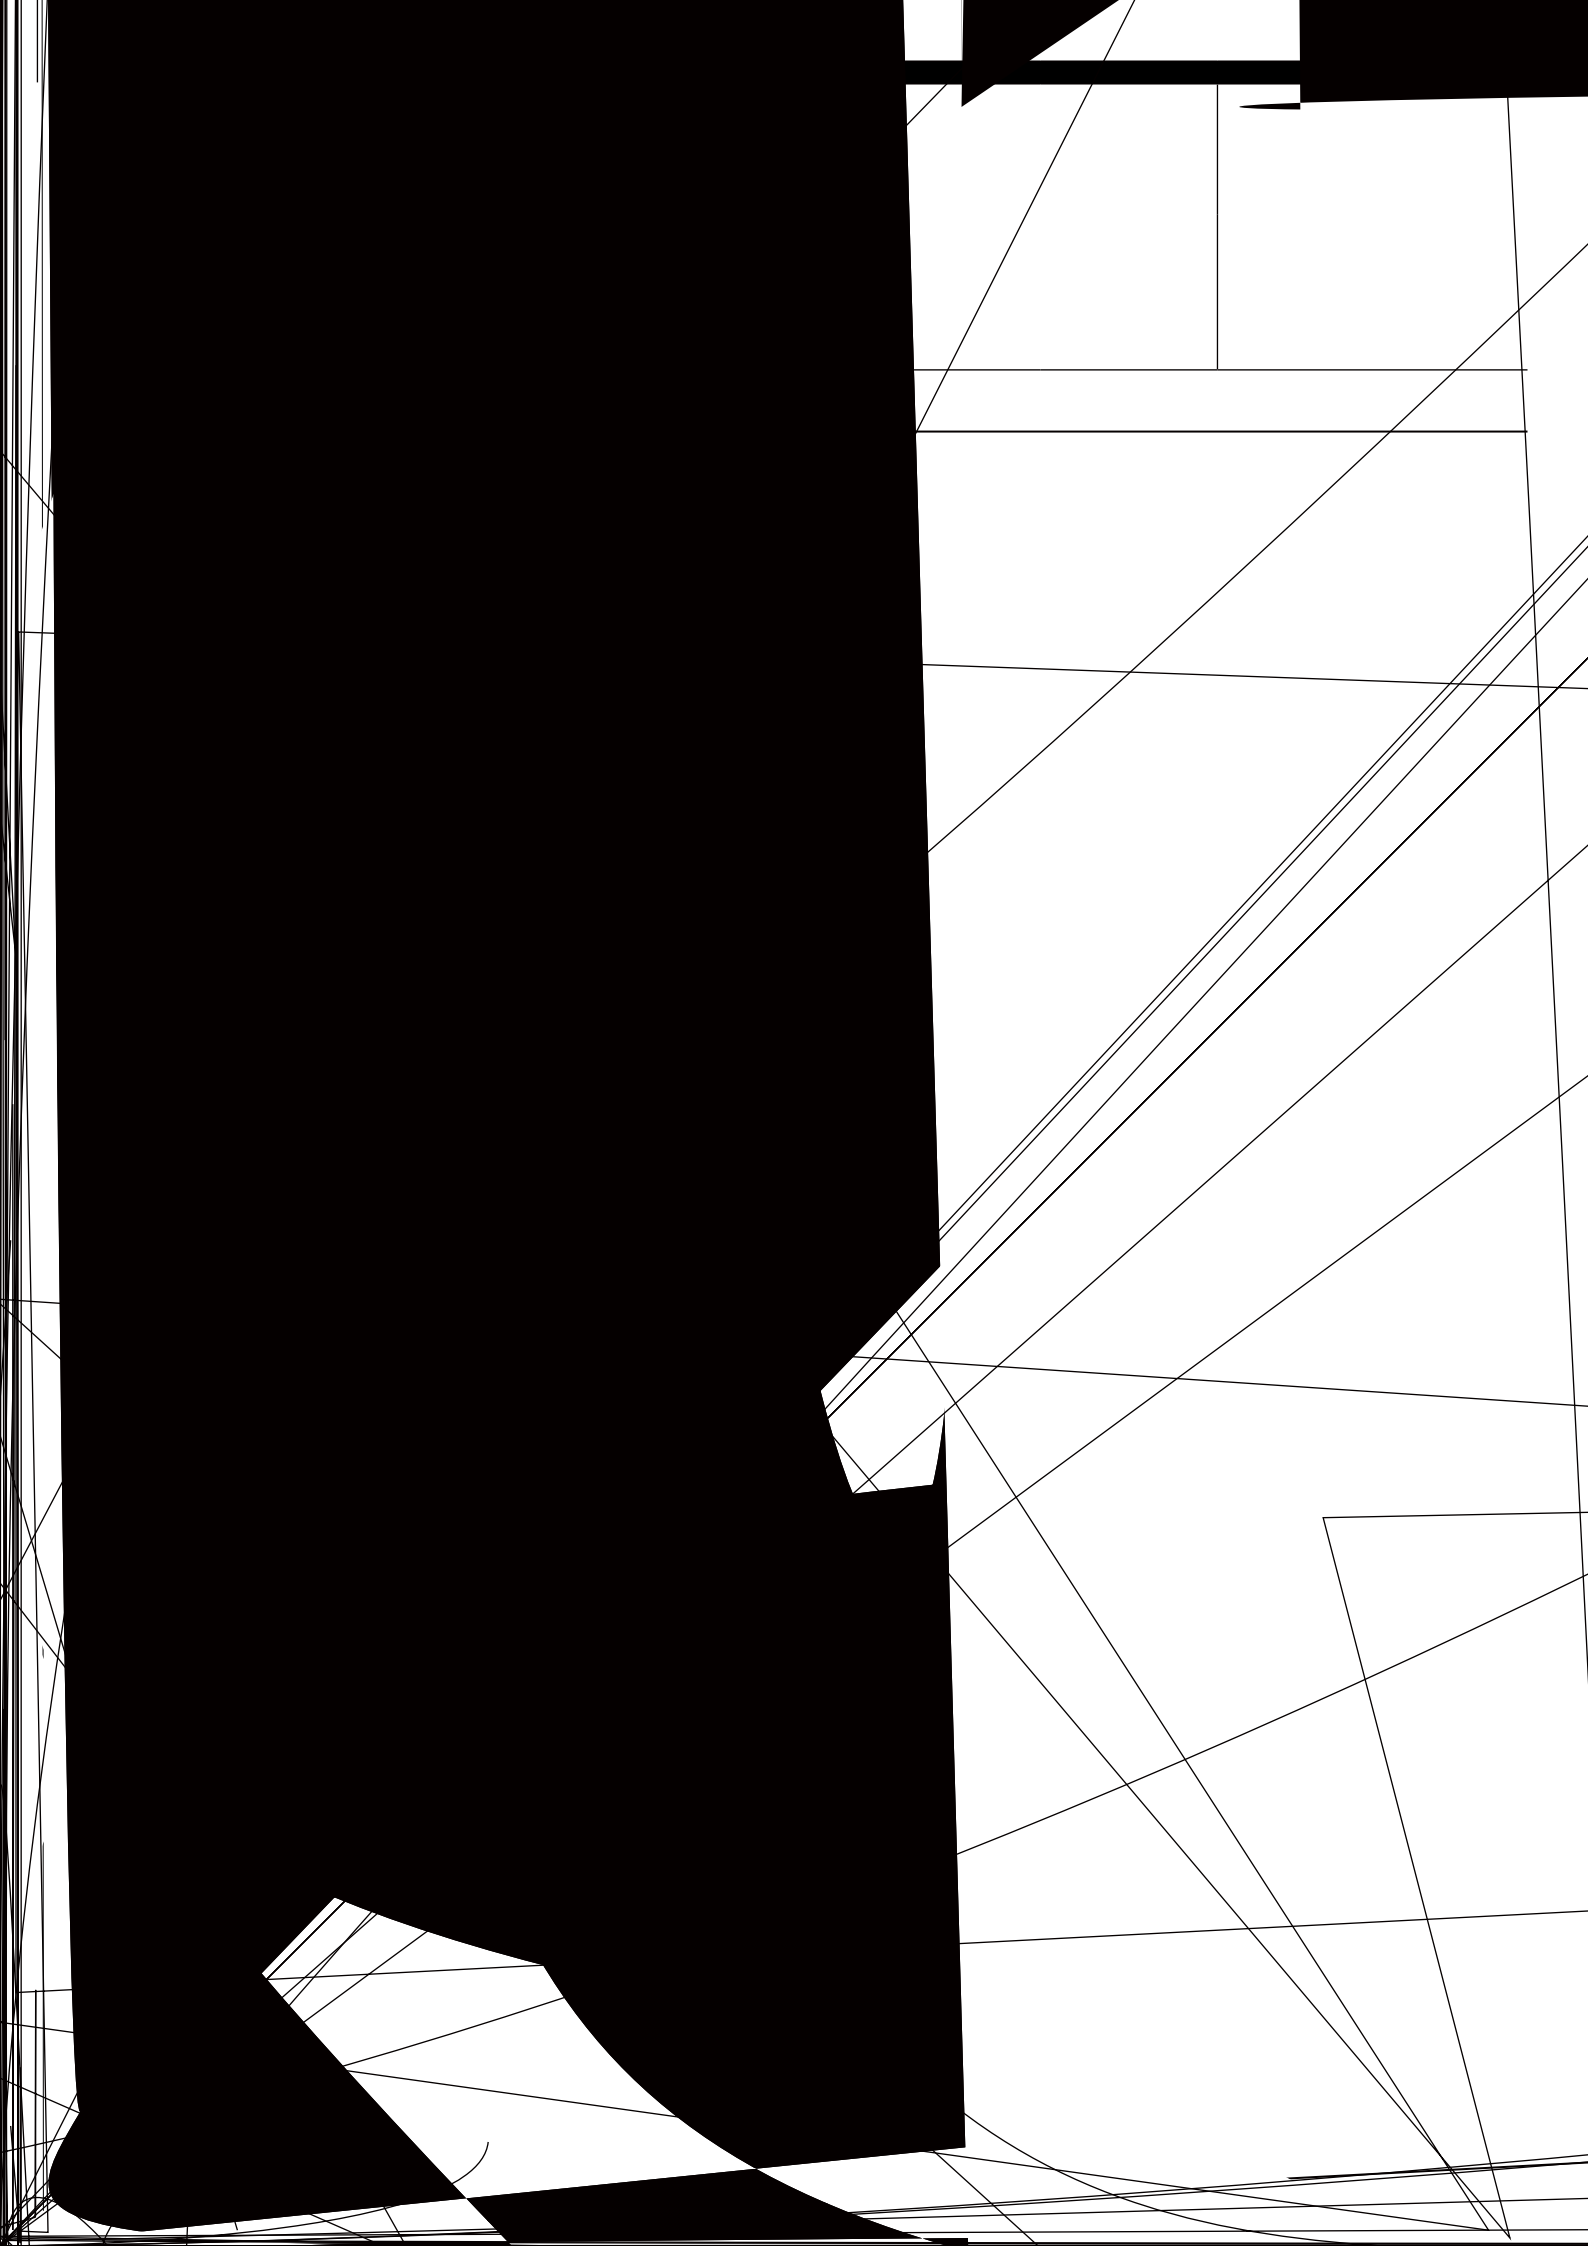
1 2 MXB